

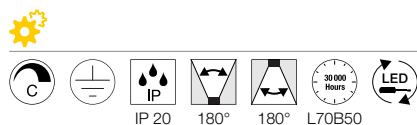






DIRETO 60  
WL, PHASE



DIRETO 90  
WL, PHASE

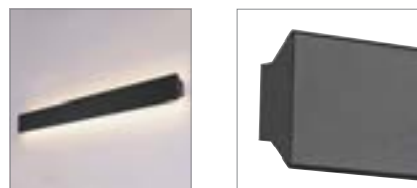

220-240V ~50/60Hz | 500mA  
Systemleistung: 14W  
Material: Aluminium

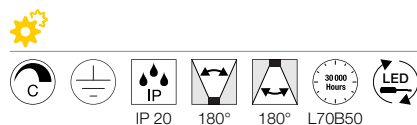

220-240V ~50/60Hz | 500mA  
Systemleistung: 20W  
Material: Aluminium

Up/Down	590/625lm 2700/3000K	


Variante	Art. Nr.
Up: 590/625lm   2700/3000K   CRI90 Down: 590/625lm   2700/3000K   CRI90	
■ schwarz	<b>1004740</b>
Up: 590/625lm   2700/3000K   CRI90 Down: 590/625lm   2700/3000K   CRI90	
□ weiß	<b>1004741</b>

Up/Down	840/880lm 2700/3000K	

Variante	Art. Nr.
Up: 840/880lm   2700/3000K   CRI90 Down: 840/880lm   2700/3000K   CRI90	
■ schwarz	<b>1004742</b>
Up: 840/880lm   2700/3000K   CRI90 Down: 840/880lm   2700/3000K   CRI90	
□ weiß	<b>1004743</b>



1004743 206

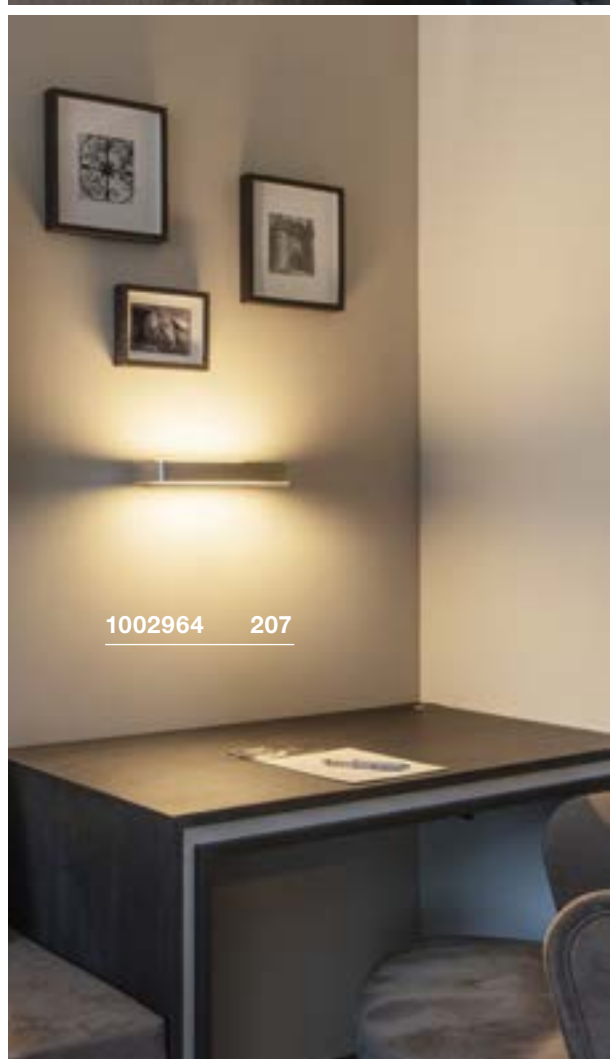

1002964 207